

BC822V2H3

3MP IP Box camera with integrated 33x zoom lens

DESCRIPTION

The BC822v2H3 is a full featured 3 Mpixel IP box camera with excellent low light sensitivity and HDR capabilities. Its integrated 33x zoom lens can perform a fast and reliable auto-focus over the whole range. The camera provides high quality, clear images in any situation

FEATURES

1/2.8 ultra-low light CMOS

3 Mpixel @ 30 fps HDR

33x Auto-focus zoom

120 dB WDR (HDR)

Quad stream H.264, H.265 and MJPEG

24 Vac, 12 Vdc, 802.3af PoE

Day/Night with IR-cut filter

ONVIF Profile S, G and T



Description

Multi-stream high definition

The camera has quad-stream capability for simultaneous streaming of H.265, H.264 and/or MJPEG. Multiple combinations of resolution and frame rate can be configured to fit different scenarios. 3 Mpixel resolution is available at 30 fps, a full-HD 1080p stream at 60 fps can be combined with a second stream at 30 fps. Each selected resolution-frame rate combination can be freely set to a stream number.

ONVIF

Multiple options are available to easily integrate the BC822v2H3 to a video management system. In support of open standards, the camera is compliant with the ONVIF Profile T for security streaming and integration with video analytics, Profile S for streaming compatibility with other VMS's, and Profile G for local storage compatibility. The BC822v2H3 seamlessly integrates with any Pan/Tilt station.

Image enhancement

The BC822v2H3 provides automatic day/night functionality with configurable thresholds, for use in low-light situations. Back-light or high-light compensation enhances image visibility in difficult lighting situations. HDR or dual shutter WDR for extreme dynamic range.

Power source choices

The BC822v2H3 can be powered by 12 Vdc, 24 Vac, or via Ethernet with 802.3af-compliant PoE sources.

Privacy masks

Privacy masks cover sections of the image. This feature is often requested for such situations as city center surveillance and point of sale keypads.

Camera

| | |
|----------------------------|--|
| Image sensor | 1/2.8 Progressive scan CMOS |
| Effective pixels | 2065 (H) x 1553 (V) |
| Shutter speed | 1 to 1/10.000 s |
| Day/Night | IR-cut filter |
| Minimum scene illumination | 0.04 lux (colour), 0.002 lux (b/w), F1.6 |
| Lens | 33x Optical zoom, F1.6 (wide), F5 (tele) |
| Lens focal length | 4.6 to 152 mm |
| Horizontal field of view | 55.3° (W) to 1.8° (T) |
| Body material | Aluminum alloy, ABS |
| Internal demister/heater | Standard |

Functions

| | |
|---------------------------------|---|
| Privacy masks | 8 colors, 24 dynamic masks |
| Text and picture overlay | Date, time, date & time, subtitle, image |
| Video motion detection | On / off / by schedule |
| Video motion detection alarm | Alarm output, record video clip, send alarm message, upload image |
| Network failure detection | On / off / by schedule |
| Network failure detection alarm | Alarm output, record video clip, send alarm message, upload image |
| Tamper detection | On / off / by schedule |
| Tamper detection alarm | Alarm output, record video clip, send alarm message, upload image |
| Behavior Analytics | Intrusion, Loitering Detection, Object Abandoned, Object Removal, Camera Sabotage, Wrong Direction, Object Counting |

Image control

| | |
|--------------------------|--|
| Dynamic range (WDR) | 120 dB, dual exposure HDR |
| White balance | Auto, ATW, Manual, One push |
| Image settings | Contrast Brightness Saturation Hue Sharpness |
| SNR | Better than 54dB |
| Noise reduction | 3DNR, 2DNR, Color Low, mid, high (w/ Motion Compensation) |
| Image Stabilization | Yes |
| Image enhancement | HLC/BLC |
| Digital zoom | 10x |
| Text and picture overlay | date & time, 4x line (40 characters each), preset title, image, image transparency |
| Privacy masks | 5 |
| Image rotation | 90°, 180°, 270° rotation |

Video

| | |
|---------------------------------|---|
| Video compression | H.265, H.264 (main or high profile); MJPEG |
| Number of compression instances | Any combination of H.265 or H.264 streams with possibly one MJPEG stream. |
| Supported resolutions | 2048x1536 (3MP); 1080p60, 1280x1024; 720p60; 1024x768; 800x600; 720x567(D1); 640x480 (VGA); 352x240 (CIF) |

Specs



Video

Max streaming (H264/H265/MJPEG)

| | | | | |
|--------------------------------|--|-----------|----------|---------|
| 60fps | 2048x1536 | 800x600 | | |
| 60fps | 2048x1536 | 720x480 | 352x240 | 352x240 |
| 30fps | 2048x1536 | 2048x1536 | 1280x720 | 352x240 |
| 30fps (dual shutter WDR) | 2048x1536 | 2048x1536 | 800x600 | 352x240 |
| Compression bit rate control | Constant bit rate (CBR), variable bit rate (VBR), Low bit rate (LBR) | | | |
| Number of video output streams | Up to 20 (RTSP) | | | |
| Total output data rate (max) | 60 Mb/s | | | |
| Video frame rate | 1 to 60 fps, 1 to 50 fps | | | |

Audio

| | |
|-------------------|-------------------------|
| Audio compression | G.711, G.726, AAC, LPCM |
| Audio Input | Line in |
| Audio Output | Line out |

Network

| | |
|-----------------|---|
| Local storage | Micro SD/SDHC/SDXC up to 128 GB; |
| Network storage | NAS (Support NFS, SMB/CIFS) |
| Protocols | IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, Diamond*, NTCIP*. |
| Security | User authentication, IP filtering, Digest authentication (RTSP, HTTP) HTTPS encryption (TLS1.2); IEEE 802.1x port-based network access control |
| Standard | ONVIF (Profile S, Profile G, Profile T), Siqua API |
| Web browser | IE 9, 10 and 11; limited support for Edge, Chrome, Firefox |

Environmental

| | |
|---------------------------|---------------------------------|
| Ingress protection level | IP20 |
| Ambient temperature range | -30°C to 60°C (-22°F to 140°F) |
| Relative humidity | 10 to 90%, No condensation |
| Power supply | 12 Vdc, 24 Vac, 802.3af Class 0 |
| Power consumption | Max. 13.68 W |

Mechanical

| | |
|--------------------|------------------------|
| Interfaces | |
| - Ethernet | RJ45 |
| - Alarm in / out | 2x / 1x Terminal Block |
| - 12Vdc | Terminal Block |
| - 24Vac | Terminal Block |
| - Audio in / out | 3.5 mm jack |
| - Analog Video out | 2-pin terminal block |
| - RS485 | Terminal Block |
| Dimensions | 116 x 82.6 x 60 mm |
| Weight | 0.49 kg |

Specs




Mechanical

| | |
|-------|-------------------------|
| Color | RAL 9003 (signal white) |
|-------|-------------------------|

Ordering information

| | |
|-----------|---|
| BC822v2H3 | 3MP IP Box camera with integrated 33x zoom lens |
|-----------|---|

DIMENSION IN MM

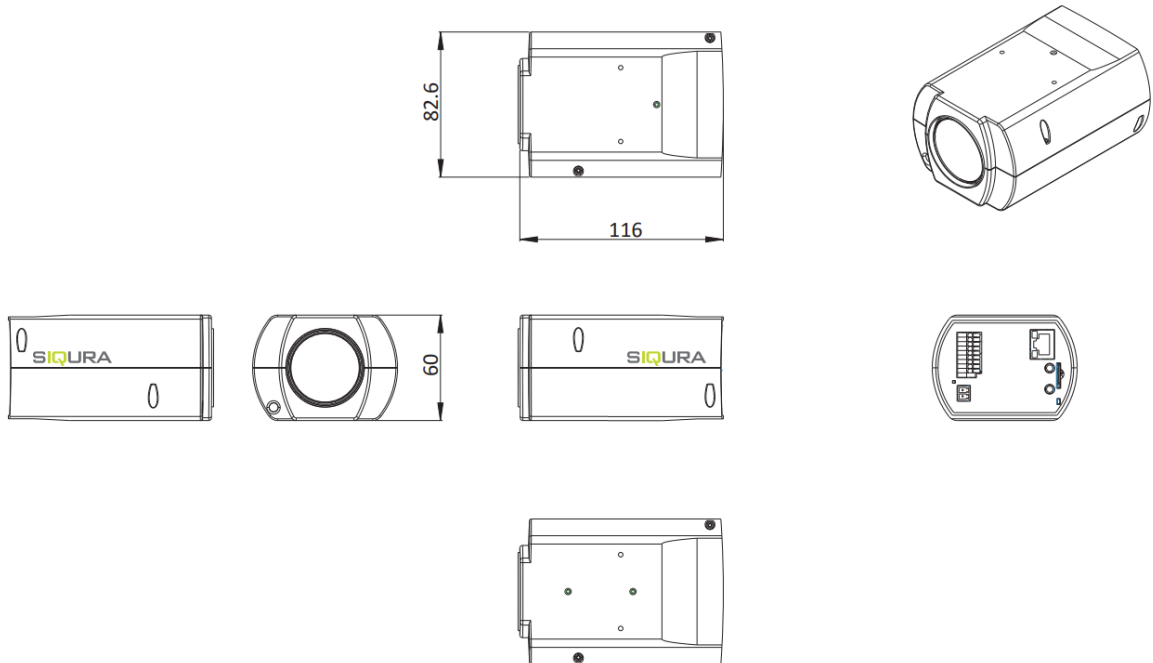

RELATED



Siqua Fixed Camera Accessories
Mounting kits for fixed dome and bullet camera



Siqua HSG04
Outdoor Wiper housing for a fixed box camera



Siqua HSG02LV
Outdoor housing for a fixed box camera



Siqua XSNet 3100EoC
10/100/1000Base-TX Ethernet over Coax Adapter



Siqua XSNet 3100 MC
10/100Base-TX to FX media converter



Siqua XSNet C3100MC
Hardened 10/100Base-TX to 100Base FX Media Converter



Siqua XSNet 3200MC PoE+
10/100Base-TX PoE+ to 100Base FX SFP Media Converter



TKHSecuritySolutions XSNet S4104 SW
4 + 2-Port Fast Ethernet switch



Siqua XSNet S4108 SW
8+2-Port Gigabit Ethernet switch



TKHSecuritySolutions XSNet C4104 SW
4-port + 2-port switch



Siqua XSNet C4108 SW
8+2-Port field-hardened Gigabit Ethernet switch



Siqua XSNet C4208 SW PoE mk2
8+2-Port Gigabit Ethernet switches with PoE

TKHSecuritySolutions XSNet C6108 SW



8+4-Port field-hardened Gigabit Ethernet switch



