

# TKH FUSION

**A camera for real-time elevated temperature detection**

## DESCRIPTION

The TKH Fusion is an elevated temperature detection kit which detects, from a distance, whether a person has a higher than normal body temperature. The TKH Security elevated temperature detection kit consists of a dual spectrum smart IP-camera and a black-body. The dual spectrum camera is fitted with a thermal sensor, based on an uncooled microbolometer, to measure temperatures and a high-grade full-HD optical sensor to view the captured images. The camera is fully ONVIF Profile S compliant for interoperability with TKH Sense or other 3rd party VMS systems.

## FEATURES

- Dual spectrum IP-camera

---
- Accurate black-body for calibration

---
- High Accuracy up to 0.3 °C

---
- Detection distance 3 to 5 m

---
- None intrusive, none contact temperature measurement

---
- Built-in detection algorithms

---
- Smart face/body detection

---
- Compact aesthetic design

---
- ONVIF profile S and G compliant

---



Thermal Module	
Detector type	Uncooled IRFPA Microbolometer
Effective pixels	400x300
Pixel size	17um
Thermal sensitivity(NETD)	40mK@F1.0, 300K
Spectral range	8-14um
Lens	Fixed 8mm, F1.0
Focus	Manual
Field of view	46° (H) x 35.3°(V)
Image setting	Polarity LUT/DVE/Mirror/3DNR/Brightness/Contrast/ROI
Color palettes	Up to 17 modes including Black-Heat/White-Heat/Rainbow/Iron-Red

Optical Module	
Image sensor	1/2.8 Sony CMOS
Effective pixels	1920x1080
Minimum scene illumination	0.01 lux (color), 0.001 lux (b/w);
Shutter speed	1/5 - 1/20,000 s
Lens	2.7 to 12.0 mm, F1.6
Lens type	motorized zoom
Horizontal field of view	105° (wide) to 32°(tele)
Wide dynamic range	120dB
S/N Ratio	More than 55dB

Video	
Compression algorithm(s)	H.265, H.264; MJPEG
Main stream	Thermal: 720x576 (D1) @25/30fps Visible: 1920x1080 @25/30fps, 1280x720 @25/30fps
Sub stream	Thermal: 352x288 (CIF) @25/30fps Visible: 720x576 (D1) @25/30fps, 640x480 (VGA) @25/30fps, 352x288 (CIF) @25/30fps
Video output	Thermal: 110 Kbps 6 Mbps Visible: 200 Kbps 18 Mbps
Compression bit rate control	Constant bit rate (CBR), variable bit rate (VBR)
Privacy masks	4 masks
Mirror	Support
Defog	Support
Image Enhance	Support
Number of video output streams	Up to 10 (RTSP)
Streaming Method	Unicast

Analytics	
Behavior analytics	Smart Body Detection, Perimeter, Single Virtual Fences, Double Virtual Fences, Object Left, Object Removed.
Alarm trigger	Motion detection, Temperature alarm, disk alarm, Over Temperature alarm

### Body Temperature Detection

# Specs



## Body Temperature Detection

Accuracy	0.3 °C
Response Time	Less than 30ms
Temperature Measurement Range	-20 °C ~ 60 °C (-4°F ~ 140°F)

## Audio & Alarm

Two-way audio	Line in / line out
Compression	G.711, AMR, RAW_PCM(Optional)
Alarm input	2x
Alarm output	2x
Serial port	RS-485, 2-wire
Protocols	Pelco D

## Network

Interface(s)	10/100 Mb Ethernet
Network protocols	IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, SMTP, IGMP, ICMP, SNMP UPnP, DHCP, PPPoE
Security	802.1x, Watermark, IP address filtering
API	ONVIF (Profile S, Profile G)
Connector type	RJ-45

## Management

Supported browsers	Internet Explorer 11+, Chrome, Firefox
Password levels	User and Administrator
Storage options	Micro SD card (128 GB max); NAS

## Power

Power	12 Vdc / 802.3af PoE class 0
Power consumption	< 10 W
Connector type	2 pin terminal block

## Environmental

Operating temperature	-30 °C to +60 °C (-22 °F to +140°F)
Relative humidity	10% to 90%, no condensation
Ingress Protection	IP66
Dimensions (camera body)	212 x 182 x 136mm ( 8.34 x 7.16 x 5.35 In )
Weight	2.1 kg (4.6 lbs)

## Black Body

Temperature range	5 °C to 50 °C
Temperature resolution	0.1 °C
Accuracy	+/- 0.2 °C @ 40 °C
Temperature stability	+/- 0.1 to 0.2 °C per 30 minutes
Emissive Area	70mm x 70mm

# Specs





## Black Body


Effective emissivity	0.97 +/- 0.02
Operating temperature	0°C to 40°C
Relative humidity	0% to 80%, no condensation
Power	220VAC 50Hz 50W
Dimensions	110 x 120 x 180mm ( 4.33 x 4.72 x 7.08 In )
Weight	1.8kg ( 4 lbs)

## Order Information

TKH Fusion	Body temperature camera with 2 ceiling mounts, 1yr warranty
TKH Fusion Extra Warranty	Additional 1 year Warranty

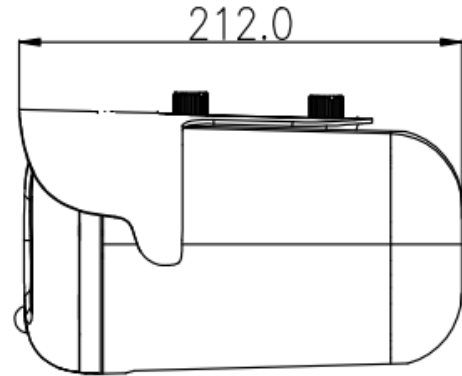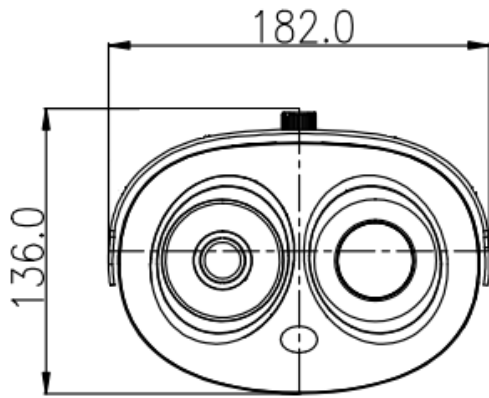

WALL MOUNT

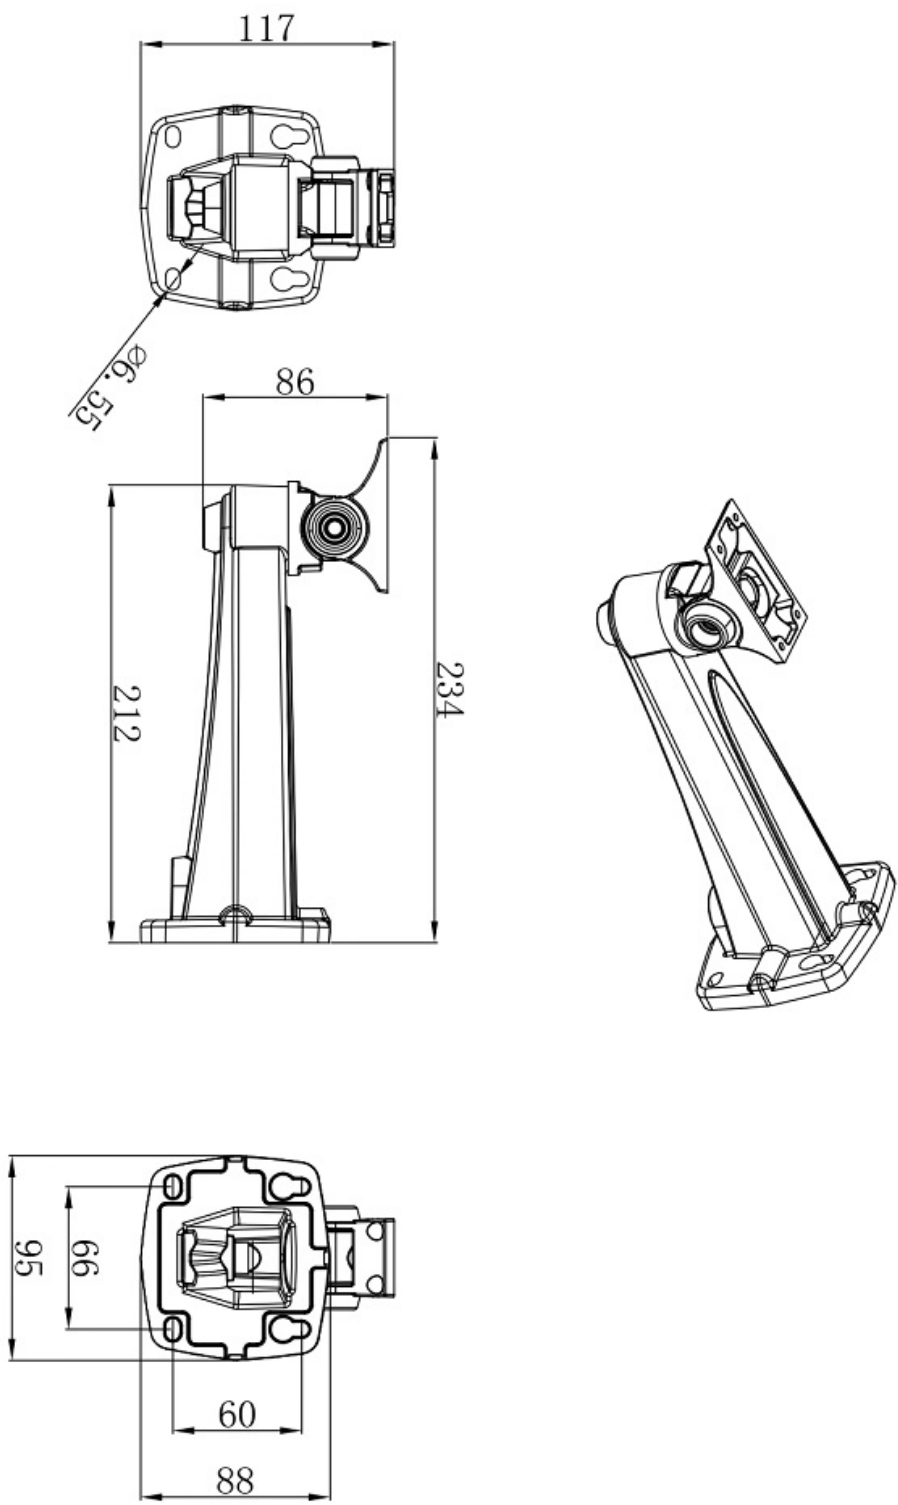

CEILING MOUNT

